Automatic BATTERY CHARGER with microprocessor

Réf. **024526**

BATIUM 15-24

*The **Batium** range controled by **microprocessor** guarantees you the maximum effectiveness and **security***

6 V | 12 V | 24 V | 35 ▸ 225 Ah (gel or liquid)

- **The charge is automatic, without surveillance**
- **The Batium chargers with microprocessor (curve WUoU) assure the charge at 100% for all types of lead-acid battery chargers :** a standard "automatic" charger (curve W2 or WU) charges in general the batteries up to 90%.
- **A sophisticated charging system : after a sector current cut, the Batium restarts the charging cycle automatically where it was cut.**
- **Forced Charging**: This function allows the starting even when the battery is heavily discharged (very low tension)

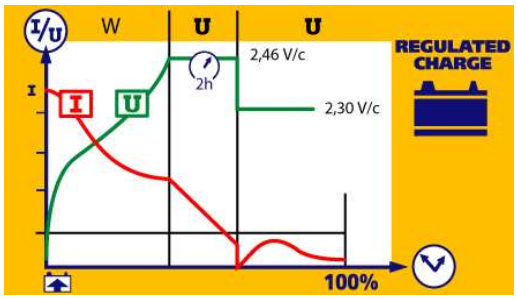

- **Protection of the electronic on board**
- **Charging without disconnecting the battery for normal charging.**
- **Protection against the polarity reversals or the battery tension errors.**
- **Tension in clamps if they are not connected to the battery - avoid short circuit and sparks**
- **Automatic compensation for sector fluctuations**

SOS RECOVERY

Sulphated Batteries to regenerate

This function can be activated for batteries which started a process of sulphatation and which cannot be recharged with a normal charge.

In this case, the BATIUM interlocks a specific cycle on 24h of regeneration charge.

If the battery is not damaged permanently, this function secures a correct load recovery in 9 cases on 10.

50/60 HZ V	V	W	CHARGE Reg	MOYEN EN 60335 Reg 1	Reg 2	Reg 3	EFFICACE/RMS A	SOS Recovery	Kg	cm
230 V	6-12-24	450	3	7A	10A	15A	22	Oui	8.5	30,5 x20 x13

CE NORMES EUROPÉENNES • EUROPEAN STANDARDS EUROPÄISCHE NORM • NORMAS EUROPEAS EUROPESE NORM

MADE in FRANCE

EN 60335-2-29

BP 4159 – 53941 St Berthevin – LAVAL Cédex FRANCE – Fax +33 (0)2 43 68 35 21

www.gys.fr - e-mail : contact@gys.fr

05/2005-2