

Automatic BATTERY CHARGER with microprocessor





Réf. 024502

BATIUM 7-24

The **Batium** range controlled by **microprocessor** guarantees you the maximum effectiveness and security

6 V **12 V** **24 V** 15 ▶ 130 Ah (gel or liquid)

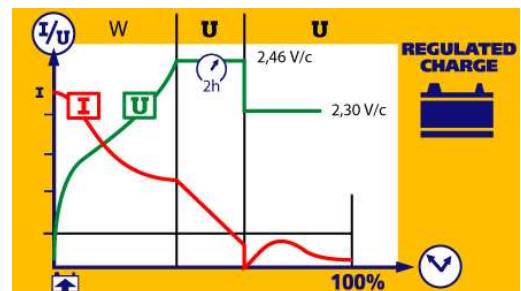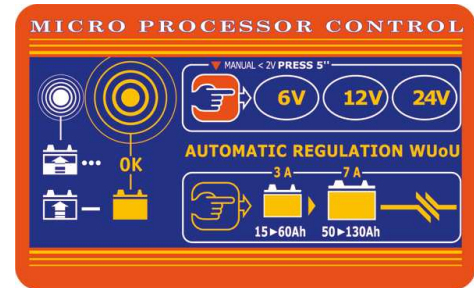

- The charge is automatic, without surveillance
- The Batium chargers with microprocessor (curve WUoU) assure the charge at 100% for all types of lead-acid battery chargers : a standard "automatic" charger (curve W2 or WU) charges in general the batteries up to 90%.
- A sophisticated charging system : after a sector current cut, the Batium restarts the charging cycle automatically where it was cut.
- **Forced Charging:** This function allows the starting even when the battery is heavily discharged (very low tension)

- Protection of the electronic on board
- Charging without disconnecting the battery for normal charging.
- Protection against the polarity reversals or the battery tension errors.
- Tension in clamps if they are not connected to the battery - avoid short circuit and sparks
- Automatic compensation for sector fluctuations

MADE in FRANCE



EN 60335-2-29

50/60 HZ V	V	W	CHARGE			Kg	cm
			MOYEN EN 60335 Reg 1	Reg 2	EFFICACE/RMS A		
230 V	6-12-24	210	3 A	7A	11	5.2	28 X20 X12

BP 4159 – 53941 St Berthevin – LAVAL Cédex FRANCE – Fax +33 (0)2 43 68 35 21

www.gys.fr - e-mail : contact@gys.fr