


Mod. "MAXI RANGE MNR 18"

<i>DIMENSIONS (mm)</i>	<i>EXTERNAL</i>	<i>USEFUL</i>
<i>Length</i>	<i>18860</i>	<i>18660</i>
<i>Width</i>	<i>5180</i>	<i>4980</i>
<i>Height</i>	<i>5510</i>	<i>4900</i>

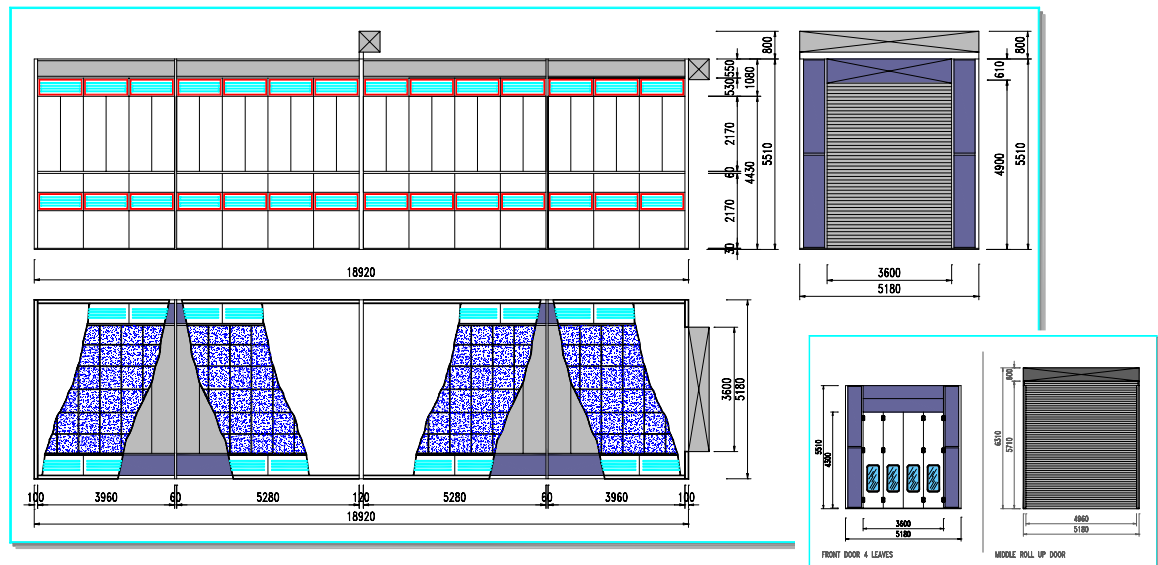

INDICATIVE DRAWING

Mod. "MAXI RANGE MNR 18"

TECHNICAL DATA

BASAMENT one central row of gratings, supporting capacity for each grate 1650 Kg

MOTORIZED FRONT DOOR mm 3600(W) mm 4900(H)

N° 2 SIDE SERVICE DOORS, right opening (antipanic system)

SIDE WALL, thickness mm 60, in biplastified galvanized sheet panels with glass wool material inbetween

INSULATED FILTERING PLENUM mm 3600(W) and having the same length of the spraybooth

LIGHTING FIXTURES N° 28 lighting fixtures in the upper part, with N° 4 neon tubes elements, and N° 26 in the lower part, tot. 216 tubes

N° 2 MAKE UP UNITS type "LM2", with N° 2 centrifugal fans and N° 2 electric motors of Kw 5,5 (Hp 7,5) each one

HEAT EXCHANGER in stainless steel, Kcal/h 280.000+280.000 (max.)

BURNER Oil (Optional : LPG or Natural Gas)

BY-PASS which opens automatically in spraying phase and which recirculate 90% of warm air in cure cycle

DRYING PHASE with partial recycle of the air

N° 2 DRY EXHAUST UNITS type "EE2", with N° 2 centrifugal fans and N° 2 electric motors of Kw 5,5 (Hp 7,5) each one

AUTOMATIC CONTROL PANEL