


## Mod. "MIDI RANGE MNR 12"

<i>DIMENSIONS (mm)</i>	<i>EXTERNAL</i>	<i>USEFUL</i>
<i>Length</i>	<i>12200</i>	<i>12000</i>
<i>Width</i>	<i>5180</i>	<i>4980</i>
<i>Height</i>	<i>5510</i>	<i>4900</i>

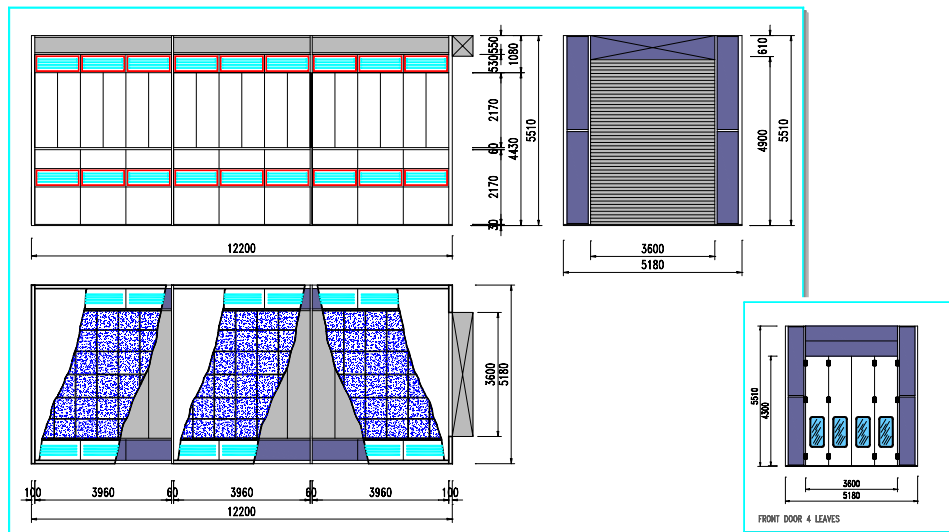

INDICATIVE DRAWING

## Mod. "MIDI RANGE MNR 12"

### TECHNICAL DATA

**BASAMENT** one central row of gratings, supporting capacity for each grate 1650 Kg

**MOTORIZED FRONT DOOR** mm 3600(W) mm 4900(H)

**N° 2 SIDE SERVICE DOORS**, right opening (antipanic system)

**SIDE WALL**, thickness mm 60, in biplastified galvanized sheet panels with glass wool material inbetween

**INSULATED FILTERING PLENUM** mm 3600(W) and having the same length of the spraybooth

**LIGHTING FIXTURES** N° 18 lighting fixtures in the upper part, with N° 4 neon tubes elements, and N° 16 in the lower part, tot. 136 tubes

**N° 2 MAKE UP UNITS** type "LM1,5", with N° 2 centrifugal fans and N° 1 electric motor of Kw 5,5 (Hp 7,5) each one

**HEAT EXCHANGER** in stainless steel, Kcal/h 240.000+240.000 (max.)

**BURNER** Oil (Optional : LPG or Natural Gas)

**BY-PASS** which opens automatically in spraying phase and which recirculate 90% of warm air in cure cycle

**DRYING PHASE** with partial recycle of the air

**N° 2 DRY EXHAUST UNITS** type "EE1,5", with N° 2 centrifugal fans and N° 1 electric motor of Kw 5,5 (Hp 7,5) each one

**AUTOMATIC CONTROL PANEL**